




- NOTES:**
1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
 2. HOLES OTHER THAN SHOWN MAY BE IN THE SLIDE MEMBERS AT JONATHAN OPTION.
 3. FOR "EM/REIMA" BRACKETS, SEE SEPARATE SECTION.
 4. USE NUMBER 8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU THE SLIDE MEMBERS.
 5. CUSHIONED CLOSED POSITION STOP.



ISOMETRIC REPRESENTATION



END VIEW

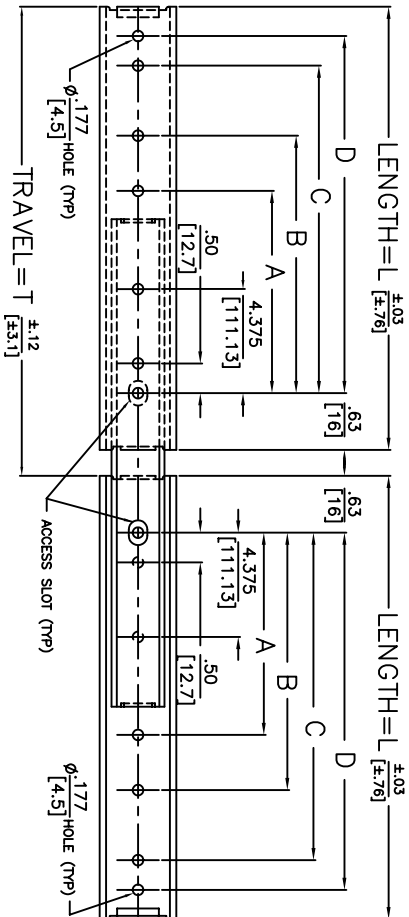

PART NO.	SLIDE LENGTH DIM.	SLIDE TRAVEL DIM.	MOUNTING HOLE PATTERN				LOAD RATING PER PAIR
			A	B	C	D	
340-10	10	10.88					140 LBS 64 KG
340-12	12	12.88					135 LBS 61 KG
340-14	14	14.88					131 KG 60 KG
340-16	16	16.88					128 LBS 58 KG
340-18	18	18.88					125 LBS 57 KG
340-20	20	20.88					120 LBS 55 KG
340-22	22	22.88					115 LBS 52 KG
340-24	24	24.88					110 LBS 50 KG
340-26	26	26.88					108 LBS 48 KG
340-28	28	28.88					100 LBS 45 KG
340-30	30	30.88					95 LBS 43 KG

Jonathan Engineering Solutions

Website: www.jonathanengr.com
 Irvine Technology Center
 410 Exchange, Suite 200
 Irvine, CA 92602
 Tel: (714) 665-4400

United States • Mexico • China • Taiwan

DIMENSIONS SHOWN AS: [IN] [MM]		PART NO. 340	
TOLERANCE UNLESS OTHERWISE NOTED		DESCRIPTION: STEEL	
.XX	±.020	SERIES 340	
.X	±.51	LOAD RATING: 95-140 LBS. / 43-64 KG.	
.XXX	±.010	DATE: 6/04	
.XX	±.25	COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS	
ANGLES ±1°			