




- NOTES:**
- LEFT SLIDE AS SHOWN, RIGHT SLIDE OPPOSITE. FOR BRACKETS, SEE SEPARATE SECTION.
 - CABINET SECTION OR CHASSIS SECTION MAY BE PURCHASED SEPARATELY AND ARE INTERCHANGEABLE. CONTACT JONATHAN FOR ORDERING INSTRUCTIONS.
 - AMOUNT OF ROLLERS TO BE DETERMINED BY JONATHAN ENGINEERED SOLUTIONS.
 - SLIDE LOCKS IN OPEN POSITION ONLY.
 - SLIDE FEATURES QUICK DISCONNECT OF CHASSIS SECTION.
 - MOUNTING HOLE TOLERANCE: $\pm .005$
 - DYNARACE IS A STAINLESS STEEL STRIP INSERTED INTO THE OUTSIDE CHANNEL BEARING FOR IMPROVED CYCLE LIFE, LOAD RATING AND OTHER CHARACTERISTICS. PLEASE CONTACT JONATHAN ENGINEERED SOLUTIONS FOR DETAILS.

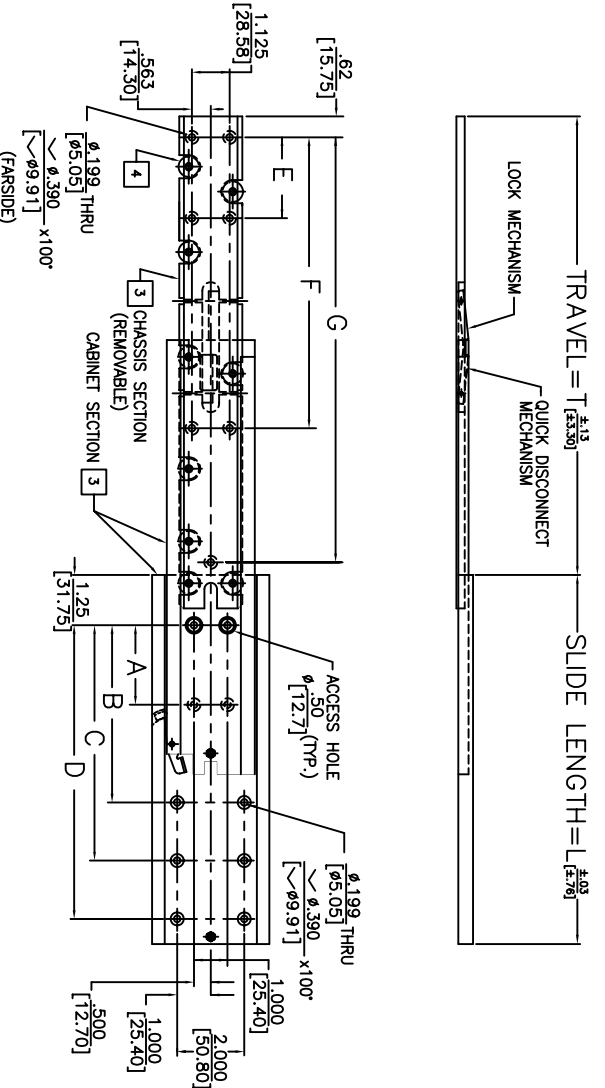

ISOMETRIC REPRESENTATION



PART NO.	SLIDE DIM.	SLIDE TRAVEL	MOUNTING MEMBER	HOLE PATTERN	CHASSIS SECTION	LOAD RATING
SERIES	L	T	A B C D	E F G	PER PAIR	
DR1500D-10	10	9				240 LBS
DR1500D-10	254	228.6				108 KG
DR1500D-12	12	11				265 LBS
DR1500D-12	304.8	279.4				120 KG
DR1500D-14	14	13				260 LBS
DR1500D-14	355.6	330.2				117 KG
DR1500D-16	16	15				241 LBS
DR1500D-16	406.4	381				109 KG
DR1500D-18	18	17				214 LBS
DR1500D-18	457.2	431.8				97 KG
DR1500D-20	20	19				198 LBS
DR1500D-20	508	482.6				89 KG
DR1500D-22	22	21				183 LBS
DR1500D-22	558.8	533.4				83 KG
DR1500D-24	24	23				171 LBS
DR1500D-24	609.6	584.2				77 KG
DR1500D-26	26	25				163 LBS
DR1500D-26	660.4	635				73 KG
DR1500D-28	28	27				156 LBS
DR1500D-28	711.2	685.8				70 KG



Irvine Technology Center
 410 Exchange, Suite 200
 Irvine, CA 92602
 Tel: (714) 665-4400
 Website: www.jonathanengr.com
 Engineering • Production • Integration • Subassembly • Logistics
 United States • Mexico • China • Taiwan

DIMENSIONS SHOWN AS: IN. [MM]

TOLERANCE UNLESS OTHERWISE NOTED

XX	±.010
XXX	±.005
XXX	±.13
XX	±1°

PART NO. 1500D

DESCRIPTION: ALUMINUM SERIES 1500D

DATE: 6/04

LOAD RATING: 156-265 LBS. / 70-120 KG.

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS