NOTES:

1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
2. SLIDE IS PROVIDED WITH QUICK DISCONNECT "T" SECTION.
3. CABINET SECTION AND CHASSIS SECTION (T-SECTION) MAY BE PURCHASED SEPARATELY AND ARE INTERCHANGEABLE. CONTACT JONATHAN FOR ORDERING INSTRUCTIONS.
4. MOUNTING HOLE TOLERANCE: $\frac{\pm.005}{[\pm.13]}$

ORDERING INFO:

300T–LENGTH (SLIDE WITHOUT LOCK)
300TL–LENGTH (SLIDE WITH LOCK OPEN)
300TLR–LENGTH (SLIDE WITH LOCK OPEN & FRONT RELEASE)

✱WHEN USED AS PAIRS, DOUBLE LOAD RATING.



ISOMETRIC REPRESENTATION

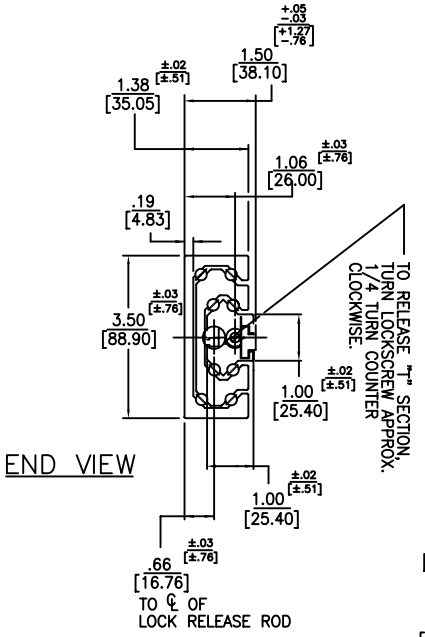


END VIEW

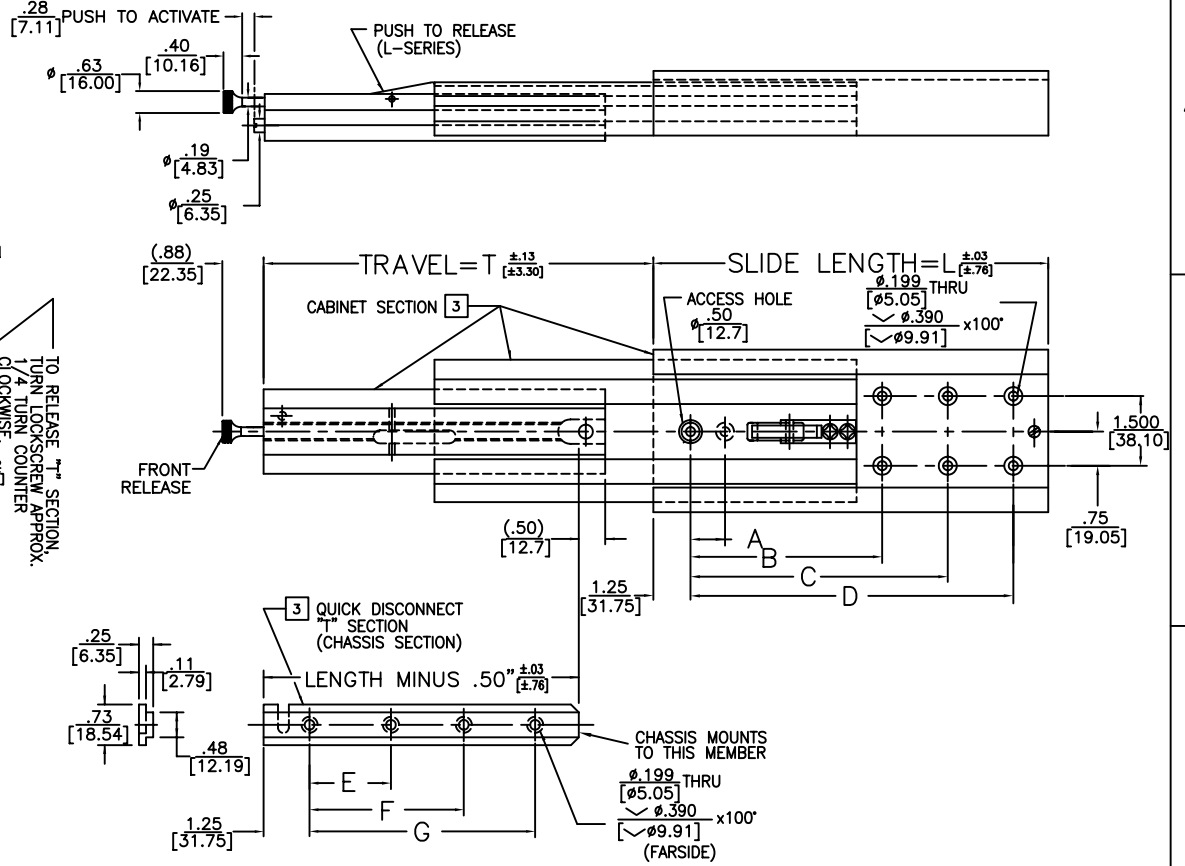


| PART NO. | SLIDE LENGTH | SLIDE TRAVEL | MOUNTING HOLE PATTERN | | | | | | | LOAD RATING |
|---|---|---|---|---|---|---|---|---|---|---|
| SERIES – LENGTH | DIM. L | DIM. T | OUTER MEMBER A | B | C | D | "T" SECTION E | F | G | ✱ EACH |
| –14 | 14 [355.6] | 13 [330.2] | | | 7 [177.8] | 12 [304.8] | | 7 [177.8] | 11 [279.4] | 258 LBS 117 KG |
| –16 | 16 [406.4] | 15 [381] | 3 [76.2] | 8 [203.2] | 11 [279.4] | 14 [355.6] | 3 [76.2] | 8 [203.2] | 13 [330.2] | 261 LBS 118 KG |
| –18 | 18 [457.2] | 17 [431.8] | 4 [101.6] | 10 [254] | 13 [330.2] | 16 [406.4] | 4 [101.6] | 9 [228.6] | 15 [381] | 260 LBS 117 KG |
| –20 | 20 [508] | 19 [482.6] | 5 [127] | 10 [254] | 14 [355.6] | 18 [457.2] | 5 [127] | 11 [279.4] | 17 [431.8] | 255 LBS 115 KG |
| –22 | 22 [558.8] | 21 [533.4] | 6 [152.4] | 12 [304.8] | 16 [406.4] | 20 [508] | 6 [152.4] | 12 [304.8] | 19 [482.6] | 249 LBS 112 KG |
| –24 | 24 [609.6] | 23 [584.2] | 6 [152.4] | 12 [304.8] | 17 [431.8] | 22 [558.8] | 7 [177.8] | 14 [355.6] | 21 [533.4] | 241 LBS 109 KG |
| –26 | 26 [660.4] | 25 [635] | 7 [177.8] | 14 [355.6] | 19 [482.6] | 24 [609.6] | 8 [203.2] | 15 [381] | 23 [584.2] | 234 LBS 106 KG |
| –28 | 28 [711.2] | 27 [685.8] | 7 [177.8] | 14 [355.6] | 20 [508] | 26 [660.4] | 9 [228.6] | 17 [431.8] | 25 [635] | 228 LBS 103 KG |
| –30 | 30 [762] | 29 [736.6] | 8 [203.2] | 16 [406.4] | 22 [558.8] | 28 [711.2] | 9 [228.6] | 18 [457.2] | 27 [685.8] | 223 LBS 101 KG |
| –32 | 32 [812.8] | 31 [787.4] | 8 [203.2] | 16 [406.4] | 23 [584.2] | 30 [762] | 10 [254] | 20 [508] | 29 [736.6] | 218 LBS 98 KG |
| –34 | 34 [863.6] | 33 [838.2] | 9 [228.6] | 18 [457.2] | 25 [635] | 32 [812.8] | 10 [254] | 21 [533.4] | 31 [787.4] | 212 LBS 96 KG |
| –36 | 36 [914.4] | 35 [889] | 9 [228.6] | 18 [457.2] | 26 [660.4] | 34 [863.6] | 11 [279.4] | 22 [558.8] | 33 [838.2] | 205 LBS 92 KG |


JONATHAN® Engineered Solutions

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665–4400
Website: www.JonathanEngr.com
Engineering • Production • Integration/Subassembly • Logistics
United States • Mexico • China • Taiwan


| DIMENSIONS SHOWN AS: IN. / [MM] | TOLERANCE UNLESS OTHERWISE NOTED |
|---|---|
| .XX / .X | ±.010 [±.3] |
| .XXX / .XX | ±.005 [±.13] |
| ANGLES | ±1° |

PART NO. 300T

DATE: 6/04

DESCRIPTION:
ALUMINUM
SERIES 300T
LOAD RATING: 205–261 LBS./ 92–118 KG.

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS