
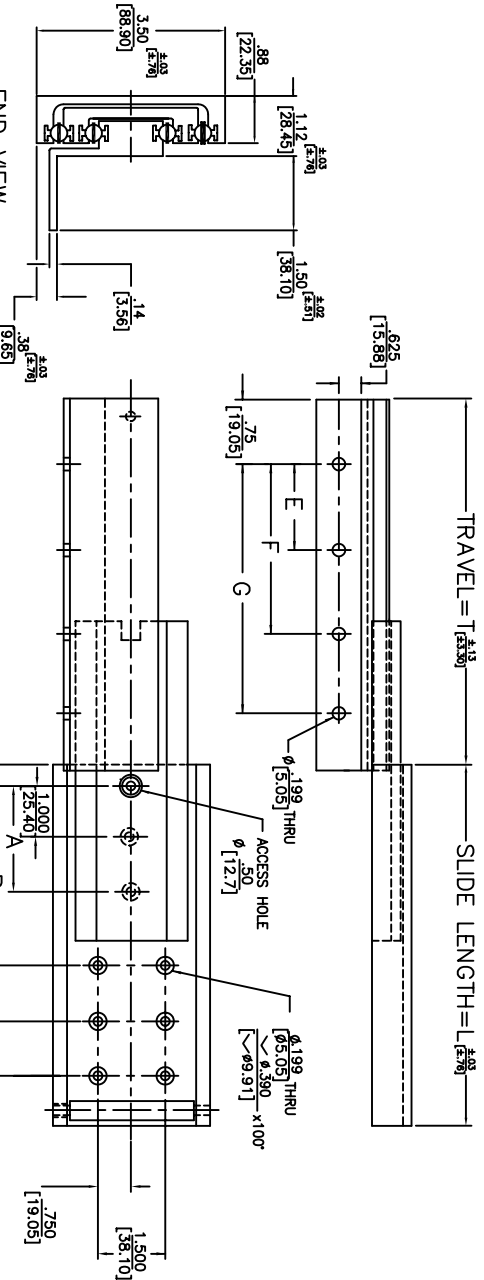


- NOTES:
1. LEFT SLIDE AS SHOWN, RIGHT SLIDE OPPOSITE
 2. FOR LOOK OPEN CONTACT JONATHAN.
 3. MOUNTING HOLE TOLERANCE: ± 0.005
[± 0.13]



ISOMETRIC REPRESENTATION

END VIEW

PART NO.	SERIES	SLIDE DIM. LENGTH	TRAVEL DIM. T	MOUNTING HOLE PATTERN							LOAD RATING PAIR	
				A	B	C	D	E	F	G		
DR351-12	12	504.8	279.4			5	10	10	3	7	10	500 LBS
DR351-14	14	565.6	330.2			6	12	12	4	8	12	500 LBS
DR351-16	16	626.4	381			7	14	14	5	9	14	500 LBS
DR351-18	18	687.2	431.8			8	16	16	6	11	16	500 LBS
DR351-20	20	748	482.6			9	18	18	7	12	18	500 LBS
DR351-22	22	808.8	533.4			10	20	20	8	13	20	420 LBS
DR351-24	24	869.6	584.2			11	22	22	9	14	22	385 LBS
DR351-26	26	930.4	635			12	24	24	10	15	24	350 LBS
DR351-28	28	991.2	685.8			13	26	26	11	16	26	315 LBS
DR351-30	30	1052	736.6			14	28	28	12	17	28	280 LBS
DR351-32	32	1112.8	787.4			15	30	30	13	18	30	245 LBS
DR351-34	34	1173.6	838.2			16	32	32	14	19	32	210 LBS
DR351-36	36	1234.4	889			17	34	34	15	20	34	175 LBS



Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Website: www.jonathanengr.com
Engineering • Production • Integration/Subassembly • Logistics
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN		PART NO.		DESCRIPTION:	
AS:	[MM]	DR351		ALUMINUM	
TOLERANCE	[MM]			SERIES DR351 (DYNARACE)	
UNLESS OTHERWISE NOTED				LOAD RATING: 280-500 LBS. / 127-226 KG.	
.XX	±.010				
.X	±.025				
.XXX	±.005				
.XX	±.13				
ANGLES	±1°				
DATE: 7/04					
COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS					