



5. USE #8 X 100° FLAT HEAD MACHINE SCREWS TO MOUNT THROUGH THE CHASSIS T-SECTION MEMBER. USE #8 PAN OR BINDING HEAD SCREWS TO MOUNT THROUGH THE CABINET MEMBER.
4. MOUNTING OPTIONS: SLIDES MAY BE USE IN AN UNDERMOUNT OR SIDE MOUNT CONFIGURATION (LOAD RATINGS IN CHART).



2. **FINISH:** CHASSIS AND CABINET MEMBER CHANNELS ARE ANODIZED PER MIL-PRF-8625 TYPE II, CLASS 2, COLOR: BLACK OR TYPE II, CLASS 1 (CLEAR). INTERMEDIATE MEMBER CHANNEL AND STAINLESS STEEL COMPONENTS ARE PASSIVATED, OR PLATED BLACK.
1. **MATERIALS:** CHASSIS AND CABINET MEMBER CHANNELS ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS. INTERMEDIATE MEMBER IS FABRICATED FROM STAINLESS STEEL. COMPONENT PARTS ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS OR STAINLESS STEEL. BALLS ARE 440 CRES OR POLYMER. BUMPER IS SANTOPRENE (T.P.E.).

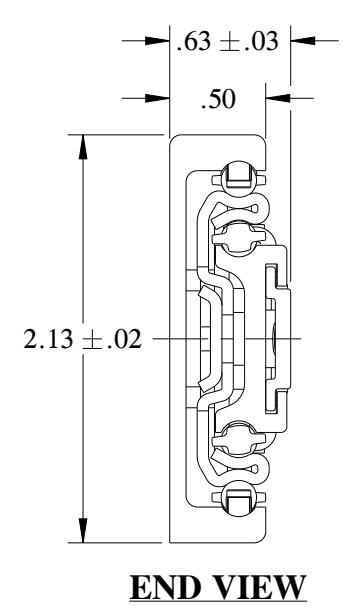

ORDERING INFORMATION
ES280HTPB-XX-P

- P = PAIR OF SLIDES
BLANK = SINGLE SLIDE
- SLIDE LENGTH
- B = BLACK
BLANK = CLEAR
- P = POLYMER BALL BEARINGS
BLANK = CRES BALL BEARINGS
- T-SECTION DISCONNECT
- HYBRID: ALUMINUM CHASSIS/CABINET MEMBERS
STAINLESS STEEL INTERMEDIATE MEMBER
- STEALTH 280 SERIES SLIDE
- EXECUTIVE SERIES: USED ONLY FOR POLYMER BALL BEARINGS AND/OR A BLACK ANODIZED FINISH

SLIDE	LENGTH	TRAVEL	CHASSIS LENGTH	MOUNTING HOLE PATTERN										LOAD RATING (LBS/PAIR) UNDER MOUNT	LOAD RATING (LBS/PAIR) SIDE MOUNT	SLIDE WEIGHT CRES BALLS (LBS/SLIDE)	SLIDE WEIGHT ACETAL BALLS (LBS/SLIDE)
				CHASSIS SECTION					CABINET SECTION								
LENGTH	L	T	M	A	B	C	D	E	F	G	H	J	K				
ES280HT-6	6.00	5.00	5.65	-	-	-	-	-	-	-	-	-	-	25	90	.67	.65
ES280HT-8	8.00	7.00	7.65	-	-	-	-	6.250	-	-	-	-	5.500	30	120	.88	.86
ES280HT-10	10.00	9.00	9.65	8.250	-	-	-	-	7.500	-	-	-	-	35	130	1.12	1.09
ES280HT-12	12.00	11.00	11.65	8.250	-	-	-	10.250	7.500	-	-	-	9.500	40	140	1.33	1.29
ES280HT-14	14.00	13.00	13.65	8.250	12.250	-	-	-	7.500	11.500	-	-	-	50	160	1.57	1.53
ES280HT-16	16.00	15.00	15.65	8.250	12.250	-	-	14.250	7.500	11.500	-	-	13.500	60	180	1.81	1.76
ES280HT-18	18.00	17.00	17.65	8.250	12.250	16.250	-	-	7.500	11.500	15.500	-	-	70	200	2.01	1.96
ES280HT-20	20.00	19.00	19.65	8.250	12.250	16.250	-	18.250	7.500	11.500	15.500	-	17.500	60	190	2.27	2.21
ES280HT-22	22.00	21.00	21.65	8.250	12.250	16.250	20.250	-	7.500	11.500	15.500	19.500	-	50	185	2.45	2.38
ES280HT-24	24.00	23.00	23.65	8.250	12.250	16.250	20.250	22.250	7.500	11.500	15.500	19.500	21.500	40	180	2.67	2.60

JONATHAN
Engineered Solutions

Irvine Technology Center
 250 Commerce, Suite 100
 Irvine, CA 92602
 Tel. (714) 665-4400
 Fax: (714) 368-7002
 Website: www.jonathanengr.com
 Engineer - Production - Integration/ Subassembly - Logistics
 United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED

PART NUMBER: **ES280HT**

DATE: 02/09/22

DESCRIPTION: **EXECUTIVE SERIES HYBRID ES280HT**

SHEET 1 OF 1

COPYRIGHT © 2012 JONATHAN ENGINEERED SOLUTIONS