


Ø .177 THRU  
C'SINK 100° X Ø .312  
FAR SIDE (TYP)

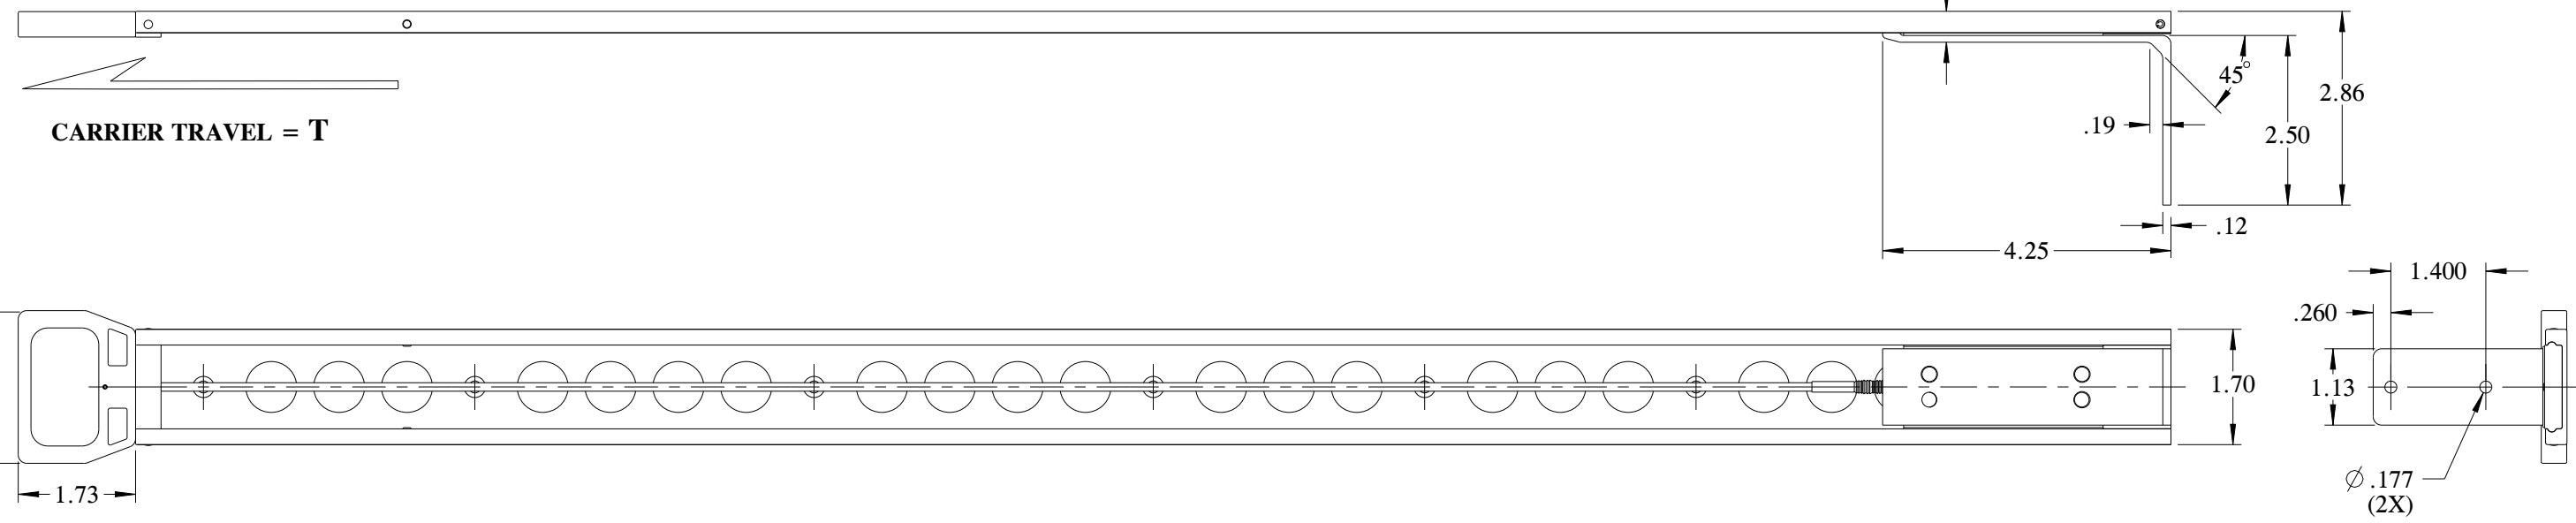


CARRIER TRAVEL = T

Ø .177  
(2X)

1. MATERIAL: CHANNELS AND CARRIER : HIGH STRENGTH ALUMINUM ALLOY,  
WITH A TENSILE STRENGTH OF 35,000 PSI PER ASTM B221.  
HANDLE: NYLON 6/6 NATURAL PLASTIC.  
COMPONENTS: STAINLESS STEEL, HIGH STRENGTH ALUMINUM ALLOY,  
PLASTIC AND TEFLON.

2. FINISHES: ANNOXIDIZED OR PASSIVATED.

3. AMOUNT AND LOCATION OF LIGHTENING HOLES  
ARE AT JONATHAN OPTION.

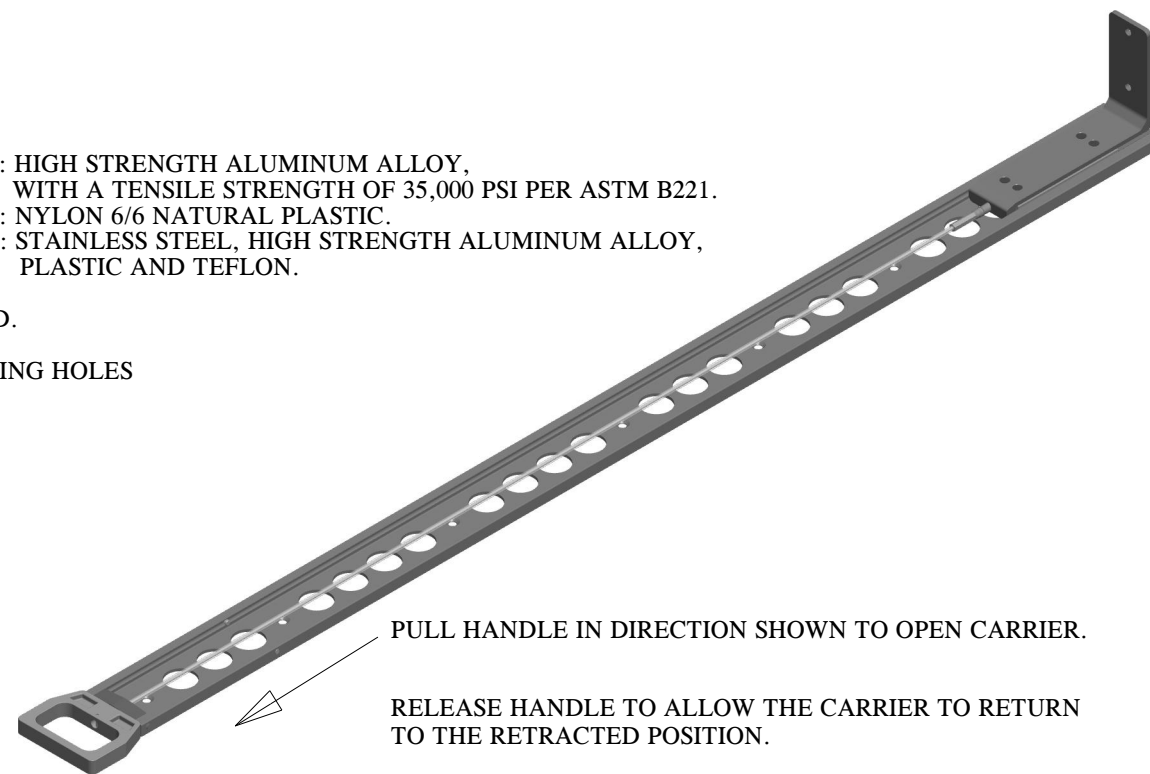

PULL HANDLE IN DIRECTION SHOWN TO OPEN CARRIER.

RELEASE HANDLE TO ALLOW THE CARRIER TO RETURN  
TO THE RETRACTED POSITION.

PART NUMBER	LENGTH L	TRAVEL T	MOUNTING HOLES				SLIDE WEIGHT
			A	B	C	D	
EXTR-515-16	16.00	8.00	13.000	-	-	-	.67 LBS
EXTR-515-20	20.00	12.00	14.000	-	-	-	.74 LBS
EXTR-515-24	24.00	16.00	14.000	18.000	-	-	.82 LBS
EXTR-515-28	28.00	20.00	14.000	18.000	22.000	-	.90 LBS
EXTR-515-30	30.00	22.00	14.000	18.000	22.000	26.000	.94 LBS
EXTR-515-32	32.00	24.00	14.000	18.000	22.000	26.000	.98 LBS



Irvine Technology Center  
410 Exchange, Suite 200  
Irvine, CA 92602  
Tel. (714) 665-4400  
Fax: (714) 368-7002  
Website: www.jonathanengr.com  
Engineer - Production - Integration/ Subassembly - Logistics  
United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED				PART NUMBER : <b>EXTR-515</b>		DESCRIPTION : <b>EXTRACTOR</b>	
.XX	.XXX	ANGLES	HOLES	DATE : 07/14/17			
± .03	± .010	± 1°	± .005				
SHEET 1 OF 1				COPYRIGHT © 2012 JONATHAN ENGINEERED SOLUTIONS			