
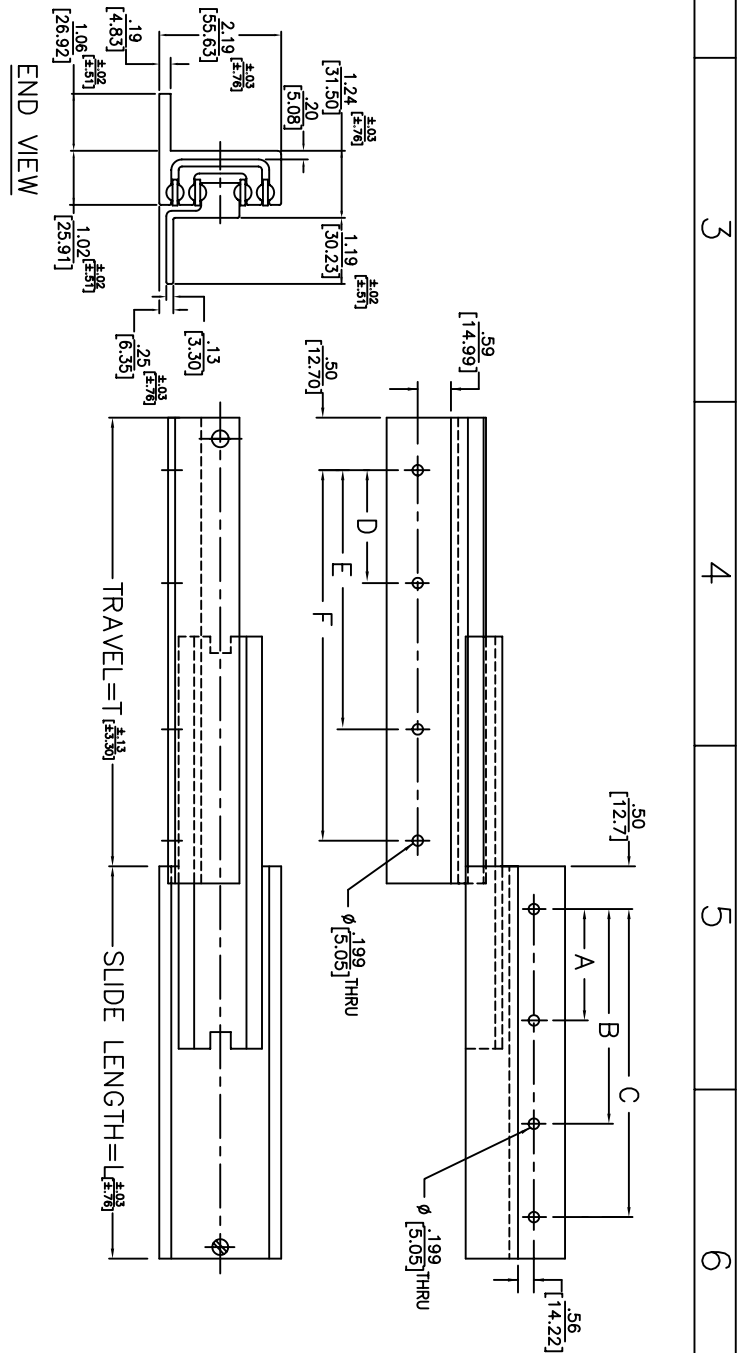


- NOTES:
1. LEFT SLIDE AS SHOWN, RIGHT SLIDE OPPOSITE.
  2. SLIDE MAY BE PROVIDED WITH LOCK, CONTACT JONATHAN.
  3. MOUNTING HOLE TOLERANCE:  $\pm .005$   
 $\pm .13$



PART NO.	SLIDE DIM.		MOUNTING HOLE PATTERN		LOAD RATING
	LENGTH	TRAVEL	A	B C D E F	
65-10	10	9	3	6 9	240 LBS
65-12	12	11	4	7 11	265 LBS
65-14	14	13	4	9 13	260 LBS
65-16	16	15	5	10 15	241 LBS
65-18	18	17	6	11 17	214 LBS
65-20	20	19	6	13 19	198 LBS
65-22	22	21	7	14 21	183 LBS
65-24	24	23	8	15 23	171 LBS
65-26	26	25	8	17 25	163 LBS
65-28	28	27	9	18 27	156 LBS
65-30	30	29	10	19 29	150 LBS
65-32	32	31	10	21 31	146 LBS
65-34	34	33	11	22 33	142 LBS
65-36	36	35	12	23 35	136 LBS

**JONATHAN**  
Engineered Solutions

Irvine Technology Center  
410 Exchange, Suite 200  
Irvine, CA 92602  
Tel: (714) 665-4400

Website: [www.jonathanEng.com](http://www.jonathanEng.com)  
Engineering • Production • Integration / Subassembly • Logistics  
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN IN: [MM]	PART NO. 65	DESCRIPTION: ALUMINUM SERIES 65
TOLERANCE UNLESS OTHERWISE NOTED	DATE: 6/04	LOAD RATING: 136-265 LBS. / 61-120 KG.
XX ±.010		
X ±.031		
XXX ±.005		
XX ±.13		
ANGLES ±1°		